




it's a personal experience  
taps | showering | accessories

technical sheet  
product code: ELE-348C/2-C/P



technical drawing:

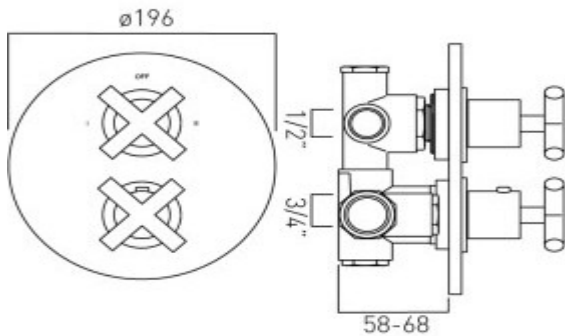

description:

concealed 2 outlet, 2 handle  
thermostatic shower valve  
wall mounted  
thermostatic cartridge V-001C-PLA  
diverter cartridge CEL-RETROFIT/DIV  
2 x 3/4" female inlets  
2 x 1/2" female outlets  
includes fittings for 1/2" and 3/4" pipework  
min-max wall mount 58-68mm (standard)  
optimum installation depth 63mm (standard)  
min-max wall mount 68-96mm (extension option)  
optimum installation depth 82mm (extension option)

68-96mm extension option (both items needed)  
1 x CEL-148/2/3/FLOW-EXT  
1 x CEL-148/TEMP-C-EXT

finishes:

chrome

guarantee:

12 year guarantee

minimum operating pressure:

1.5 bar MP

certificates and awards:



cert no. 1410024 cert no. BC1467/0914